

FEATURES:

- * 220 VAC $\pm$ 10%. 47-63 Hz.
- * over-voltage protection
- * screw connectors

SPECIFICATIONS:

- * Line regulation: 0,2%
- * Load regulation: 0,2% for 0-100% load change
- * Ripple : 7 mV_{pp} typ., 15 mV_{pp} max.
- * Current fold back: 20-100% adjustable.
- * Dimensions: LxBxH = 240x138x108 mm.


Output 1		Output 2		Output 3		Application	Model
Volt	Amp.	Volt	Amp.	Volt	Amp.		
+5	5	-12	0,3	+12	0,7	computer supply	PM-2
+5	2,5	+12	4	—	—	FDD supply	PM-3

Model PM-2 FEATURES:

- * connection for 5 Volt battery to KEMPAC Bus
- * 2 input-output user lines to KEMPAC Bus
- * connector for Reset button
- * output 1: voltage $\pm$ 10% adjustable
- * connector for power control lamp

Model PM-3 FEATURES:

- * 2 output connectors for floppy disk drives
- * connector for power control lamp
- * output 1 and output 2: voltage $\pm$ 10% adjustable

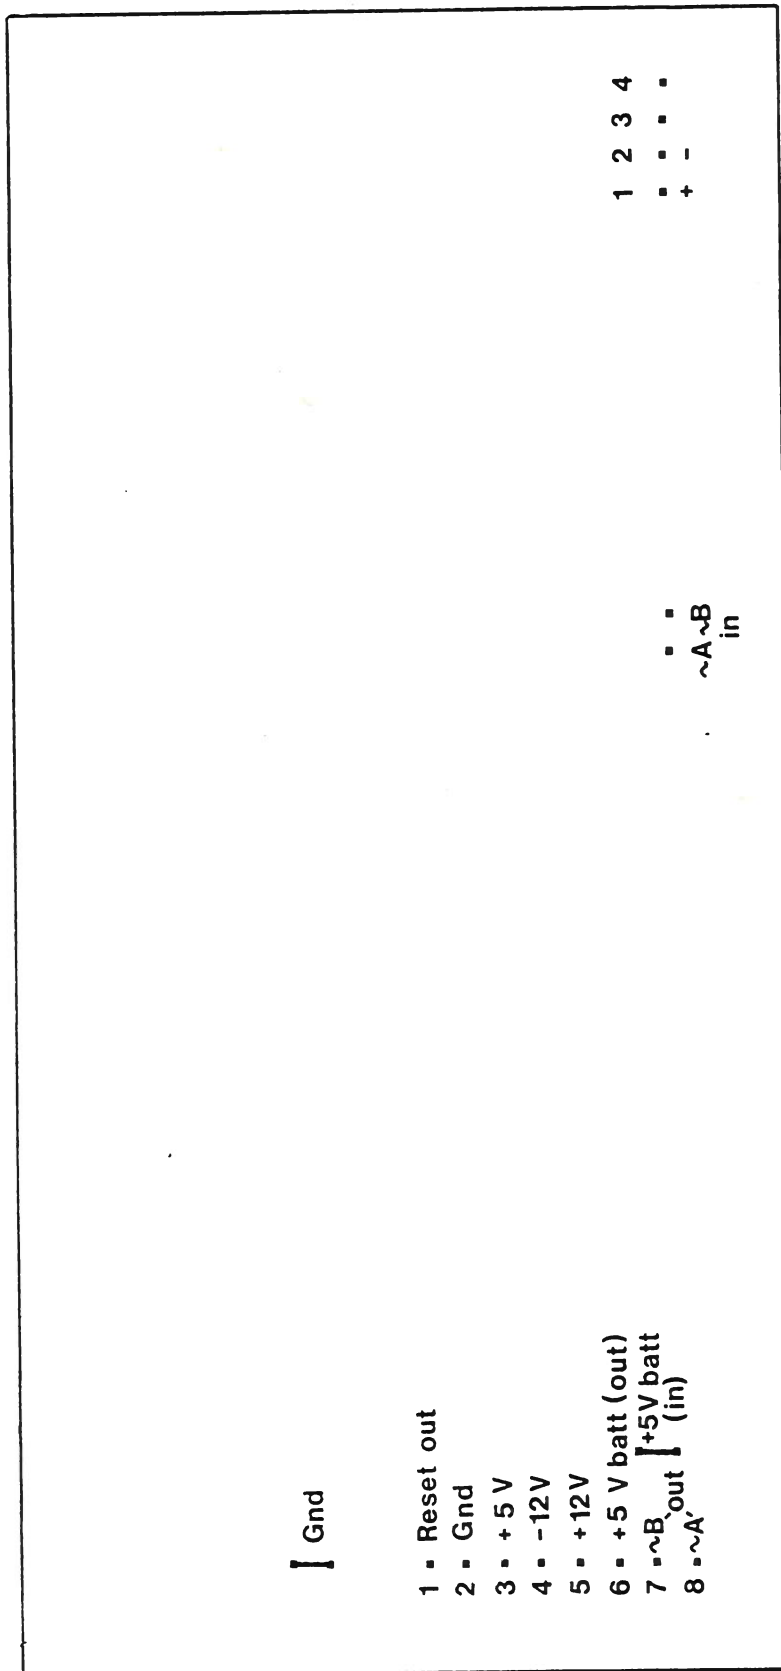

1 2
+ -

Power control 

1 Gnd

2 Gnd

3 +5V

4 +12V

1 Gnd

2 Gnd

3 +5V

4 +12V

TOP-VIEW

